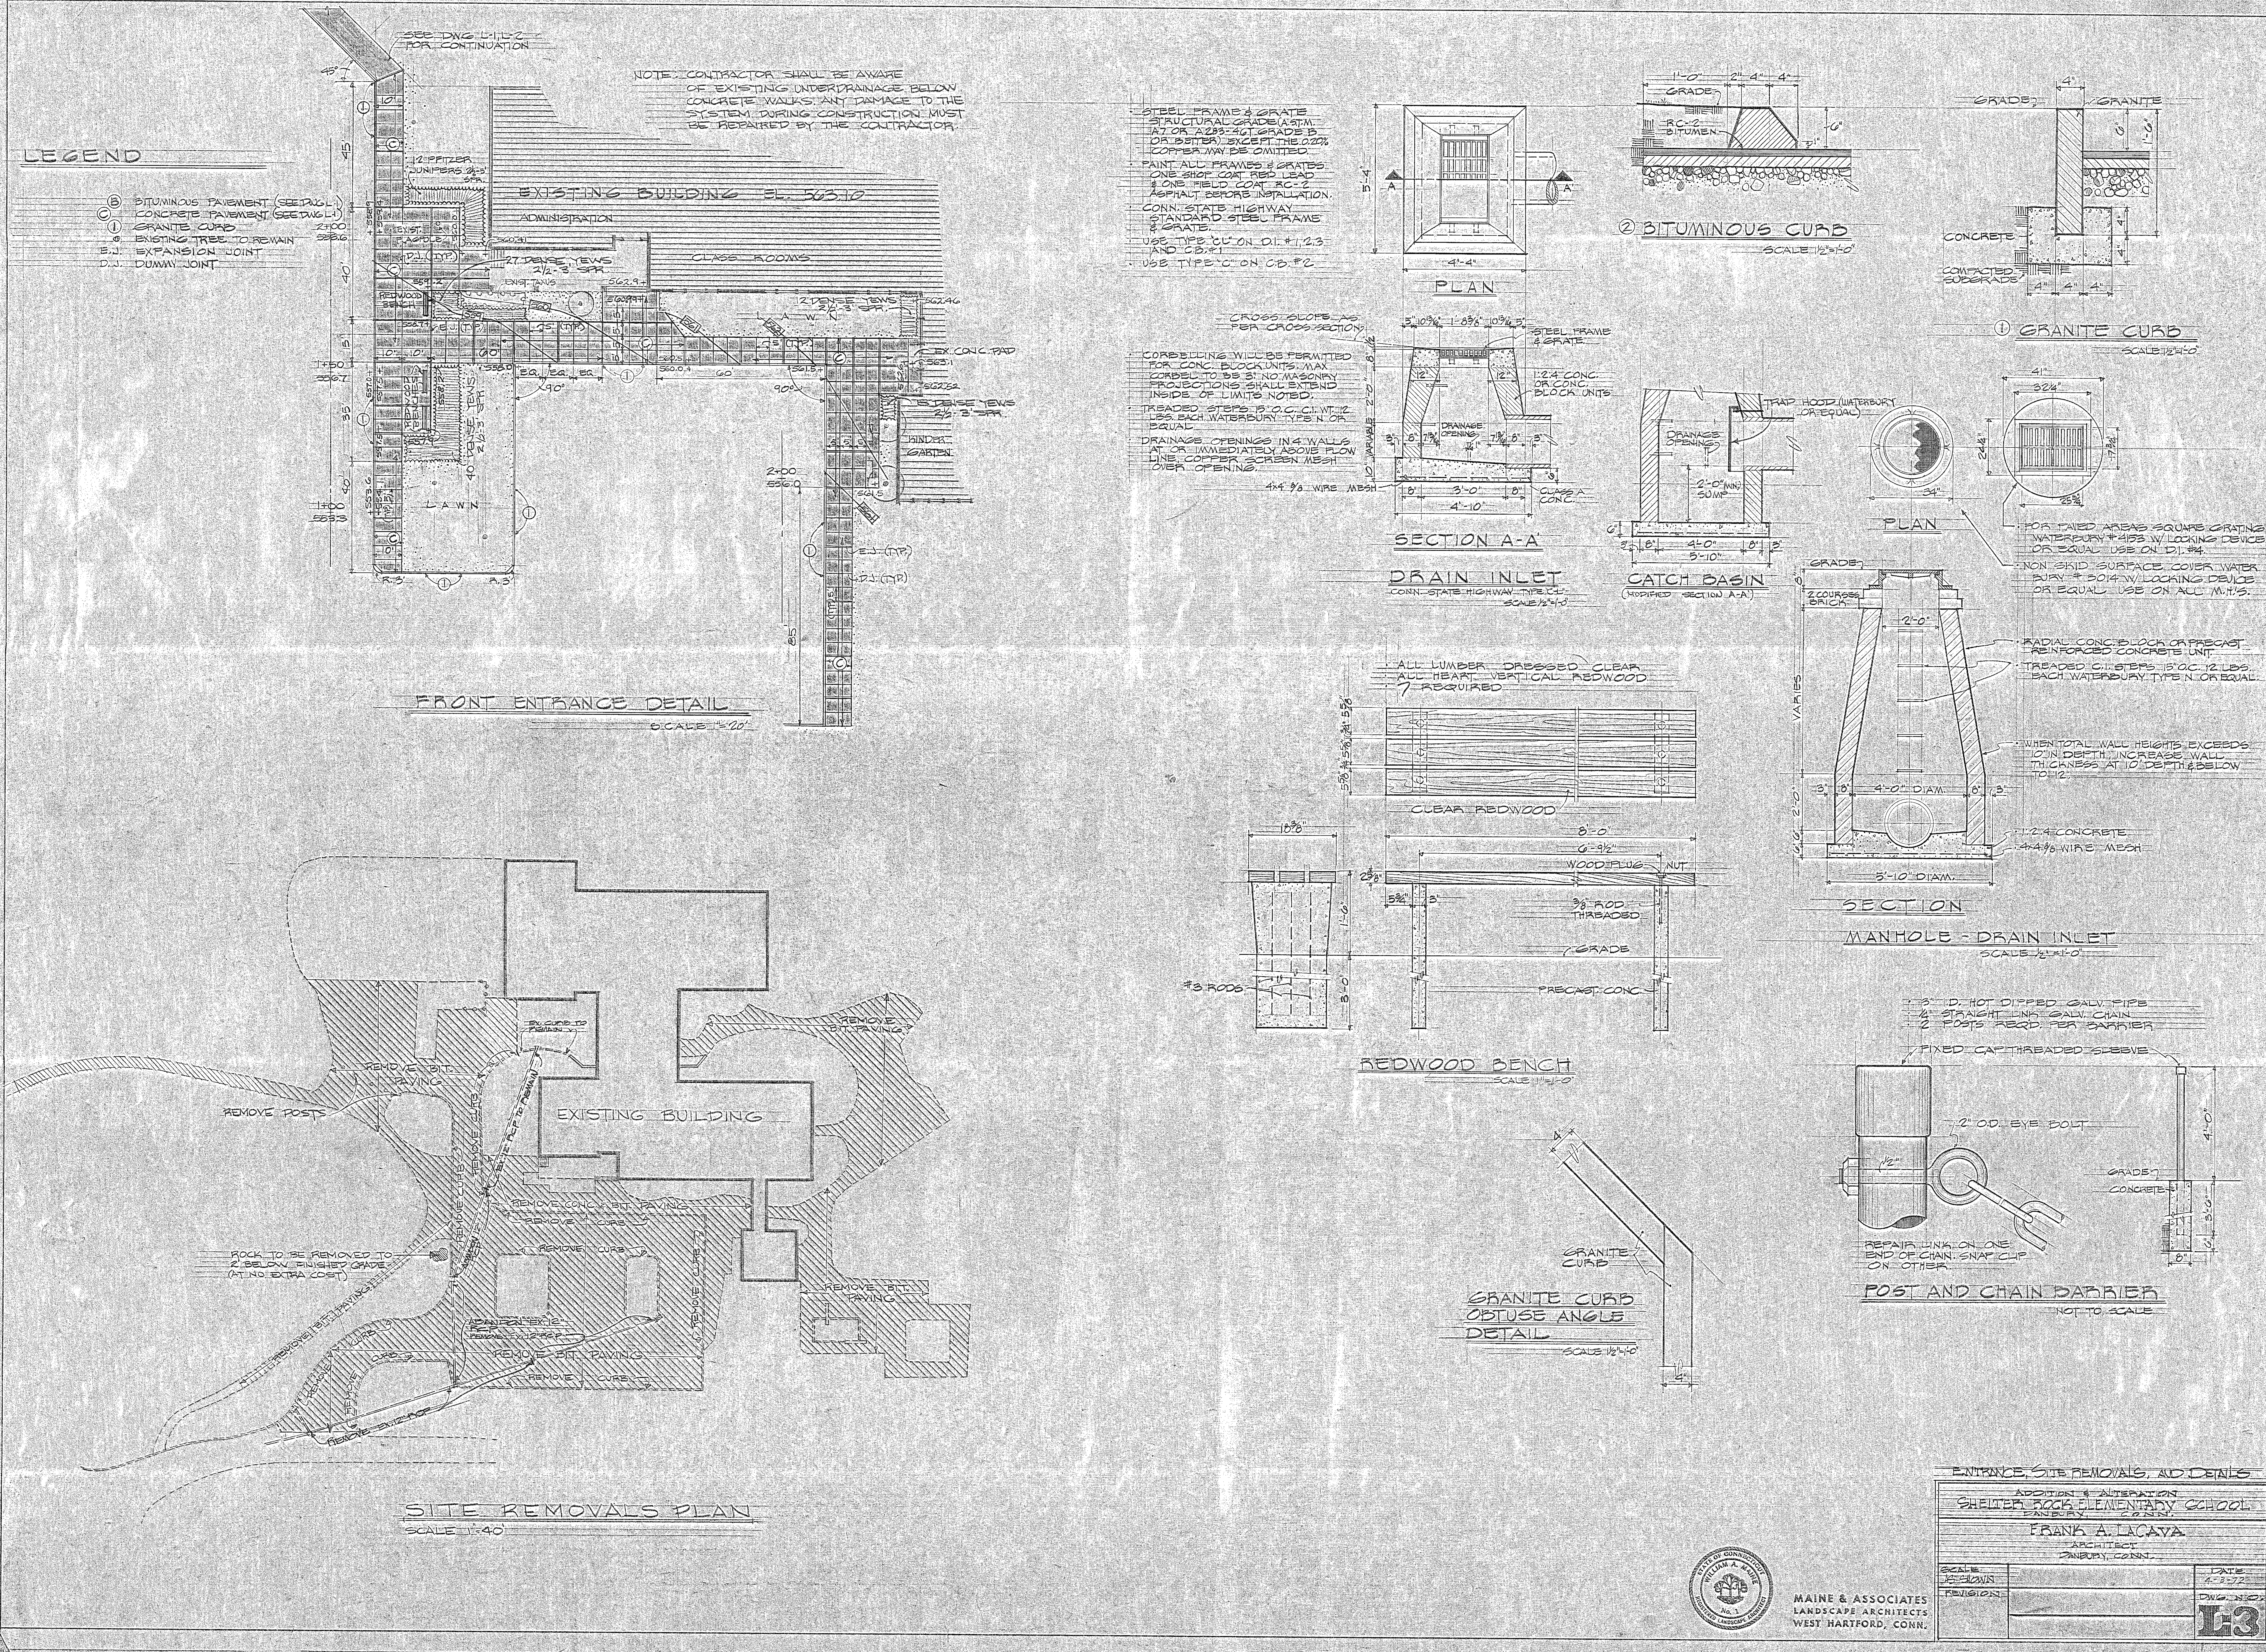

LEGEND
B BITUMINOUS PAVEMENT (SEE DWG L-1)
C CONCRETE PAVEMENT (SEE DWG L-1)
1 GRANITE CURB
EXISTING TREE TO REMAIN
E.J. EXPANSION JOINT
D.J. DUMMY JOINT
SEE DWG L-1 L-2 FOR CONTINUATION
NOTE: CONTRACTOR SHALL BE AWARE OF EXISTING UNDERDRAINAGE BELOW CONCRETE WALKS. ANY DAMAGE TO THE SYSTEM DURING CONSTRUCTION MUST BE REPAIRED BY THE CONTRACTOR.
EXISTING BUILDING EL. 563.10
ADMINISTRATION
CLASS ROOMS
12 PFITZER JUNIPERS 2½'-3' SPR.
27 DENSE YEWS 2½'-3' SPR.
40 DENSE YEWS 2½'-3' SPR.
12 DENSE YEWS 2½'-3' SPR.
15 DENSE YEWS 2½'-3' SPR.
EXIST. FLAGPOLE
EXIST. TAXUS
REDWOOD BENCH
REDWOOD BENCHES
LAWN
KINDERGARTEN
EX. CONC. PAD
E.J. (TYP.)
D.J. (TYP.)
FRONT ENTRANCE DETAIL
SCALE 1"=20'
SITE REMOVALS PLAN
SCALE 1":40'
EXISTING BUILDING
REMOVE BIT. PAVING
REMOVE CONC. & BIT. PAVING
REMOVE CURB
REMOVE POSTS
EX. CURB TO REMAIN
EX. 12" RCP TO REMAIN
ABANDON EX. 12" RCP
REMOVE EX. 12" RCP
ROCK TO BE REMOVED TO 2' BELOW FINISHED GRADE (AT NO EXTRA COST)
STEEL FRAME & GRATE STRUCTURAL GRADE (A.S.T.M. A7 OR A283-46T GRADE B OR BETTER) EXCEPT THE 0.20% COPPER MAY BE OMITTED.
PAINT ALL FRAMES & GRATES: ONE SHOP COAT RED LEAD & ONE FIELD COAT RC-2 ASPHALT BEFORE INSTALLATION.
CONN. STATE HIGHWAY STANDARD STEEL FRAME & GRATE.
USE TYPE "C" ON D.I. #1,2,3 AND C.B. #1
USE TYPE "C" ON C.B. #2
CROSS SLOPE AS PER CROSS SECTION
CORBELLING WILL BE PERMITTED FOR CONC. BLOCK UNITS. MAX CORBEL TO BE 3". NO MASONRY PROJECTIONS SHALL EXTEND INSIDE OF LIMITS NOTED.
TREADED STEPS 15" O.C. C.I. WT. 12 LBS. EACH WATERBURY TYPE N OR EQUAL
DRAINAGE OPENINGS IN 4 WALLS AT OR IMMEDIATELY ABOVE FLOW LINE. COPPER SCREEN MESH OVER OPENING.
4x4 6/6 WIRE MESH
PLAN
STEEL FRAME & GRATE
1:2:4 CONC. OR CONC. BLOCK UNITS
DRAINAGE OPENING
CLASS A CONC.
SECTION A-A'
DRAIN INLET
CONN. STATE HIGHWAY TYPE C-L
SCALE ½"=1'-0"
② BITUMINOUS CURB
SCALE ½"=1'-0"
GRADE
RC-2 BITUMEN
TRAP HOOD (WATERBURY OR EQUAL)
DRAINAGE OPENING
2'-0" (MIN.) SUMP
CATCH BASIN
(MODIFIED SECTION A-A')
① GRANITE CURB
SCALE ¾"=1'-0"
GRANITE
CONCRETE
COMPACTED SUBGRADE
PLAN
FOR PAVED AREAS SQUARE GRATING WATERBURY #4153 W/ LOCKING DEVICE OR EQUAL. USE ON D.I. #4.
NON SKID SURFACE COVER WATERBURY #5014 W/ LOCKING DEVICE OR EQUAL. USE ON ALL M.H.'S.
RADIAL CONC. BLOCK OR PRECAST REINFORCED CONCRETE UNIT
TREADED C.I. STEPS 15" O.C. 12 LBS. EACH WATERBURY TYPE N OR EQUAL
WHEN TOTAL WALL HEIGHTS EXCEEDS 10' IN DEPTH, INCREASE WALL THICKNESS AT 10' DEPTH & BELOW TO 12".
1:2:4 CONCRETE
4x4 6/6 WIRE MESH
2 COURSES BRICK
VARIES
4'-0" DIAM.
5'-10" DIAM.
SECTION
MANHOLE - DRAIN INLET
SCALE ½"=1'-0"
ALL LUMBER DRESSED CLEAR ALL HEART VERTICAL REDWOOD 7 REQUIRED
CLEAR REDWOOD
WOOD PLUG
NUT
⅜" ROD THREADED
GRADE
PRECAST CONC.
#3 RODS
REDWOOD BENCH
SCALE 1"=1'-0"
GRANITE CURB
GRANITE CURB OBTUSE ANGLE DETAIL
SCALE ½"=1'-0"
3" D. HOT DIPPED GALV. PIPE
¼" STRAIGHT LINK GALV. CHAIN
2 POSTS REQ'D. PER BARRIER
FIXED CAP THREADED SLEEVE
2" O.D. EYE BOLT
REPAIR LINK ON ONE END OF CHAIN, SNAP CLIP ON OTHER
GRADE
CONCRETE
POST AND CHAIN BARRIER
NOT TO SCALE
ENTRANCE, SITE REMOVALS, AND DETAILS
ADDITION & ALTERATION
SHELTER ROCK ELEMENTARY SCHOOL
DANBURY, CONN.
FRANK A. LACAVA
ARCHITECT
DANBURY, CONN.
SCALE AS SHOWN
REVISION
DATE 4-3-72
DWG. NO. L-3
MAINE & ASSOCIATES
LANDSCAPE ARCHITECTS
WEST HARTFORD, CONN.
STATE OF CONNECTICUT
WILLIAM A. MAINE
REGISTERED LANDSCAPE ARCHITECT
No. 1